

88

MESOMETEOROLOGY PROJECT

*Department of the Geophysical Sciences
The University of Chicago*

LUBBOCK TORNADOES

of

11 May 1970


by

Tetsuya Theodore Fujita

The University of Chicago

NUMBER 88

July 1970

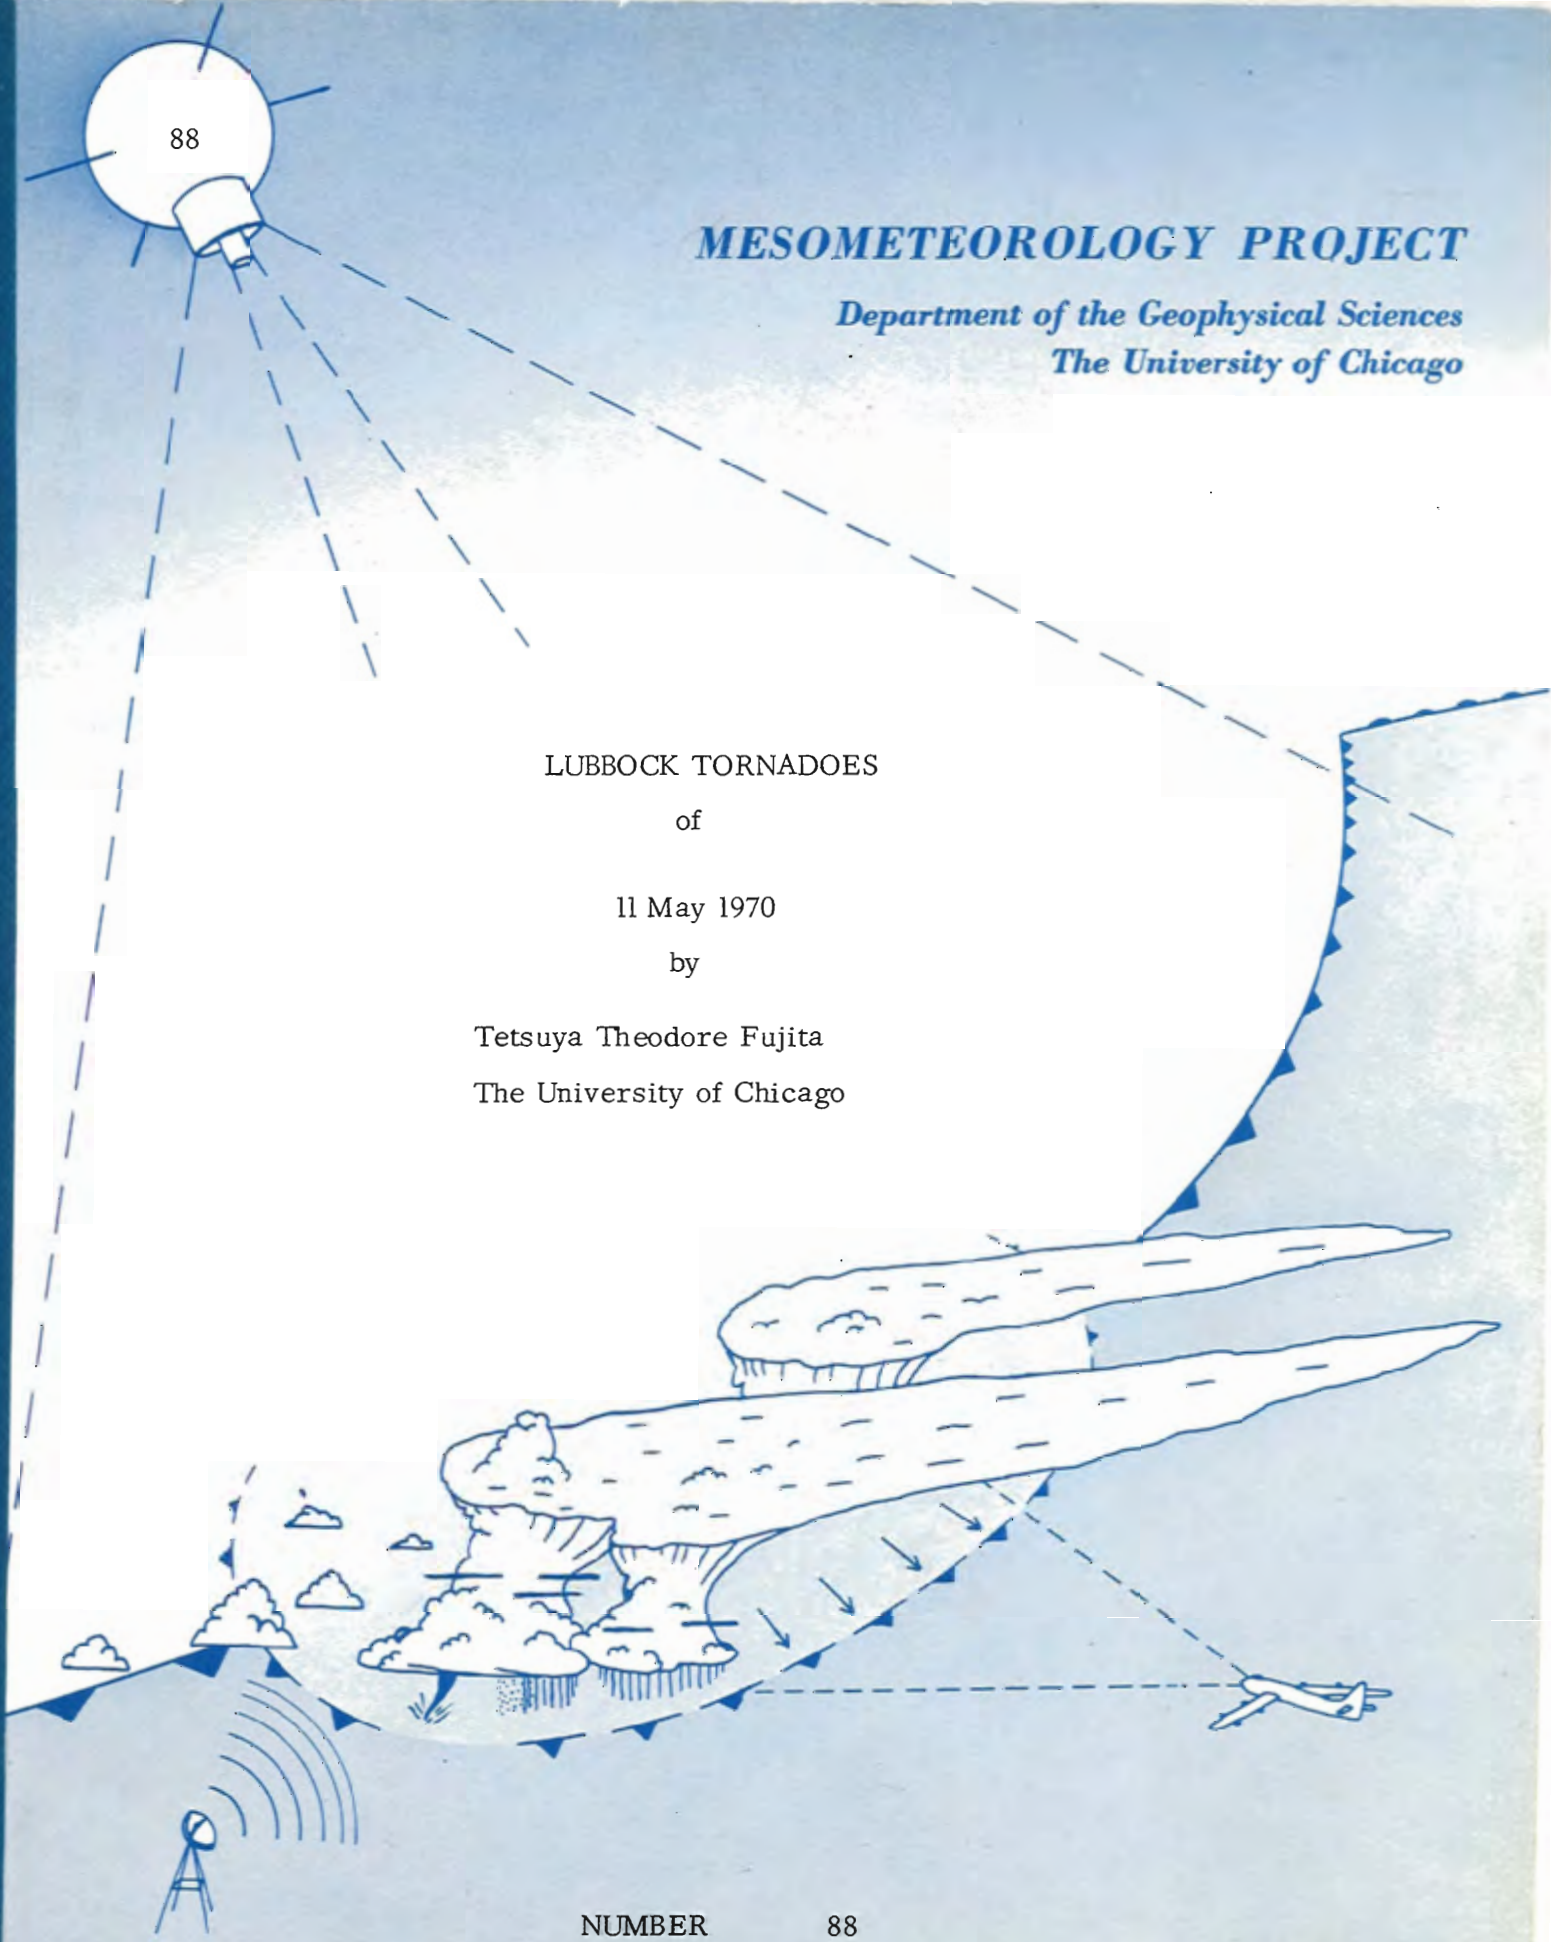

THE UNIVERSITY OF CHICAGO
DEPARTMENT OF THE GEOPHYSICAL SCIENCES
5734 ELLIS AVENUE
CHICAGO • ILLINOIS 60637

July 28, 1970

In appreciation of your contribution of information to our Lubbock Tornado Research Project, we are pleased to send you a copy of our report. This report is to be published in the August issue of Weatherwise, a bimonthly magazine of the American Meteorological Society.

We will still be working on a more detailed study of the Lubbock tornadoes to complete a final report to ESSA and NASA sometime next Autumn.

If you have further information regarding the Lubbock tornadoes or comments on the context of this report, please let me know.

Sincerely yours,



T. Theodore Fujita
Professor of Meteorology

TTF:uw
Enclosures

MESOMETEOROLOGY PROJECT --- RESEARCH PAPERS

1. * Report on the Chicago Tornado of March 4, 1961 - Rodger A. Brown and Tetsuya Fujita
2. * Index to the NSSP Surface Network - Tetsuya Fujita
3. * Outline of a Technique for Precise Rectification of Satellite Cloud Photographs - Tetsuya Fujita
4. * Horizontal Structure of Mountain Winds - Henry A. Brown
5. * An Investigation of Developmental Processes of the Wake Depression Through Excess Pressure Analysis of Nocturnal Showers - Joseph L. Goldman
6. * Precipitation in the 1960 Flagstaff Mesometeorological Network - Kenneth A. Styber
7. ** On a Method of Single- and Dual-Image Photogrammetry of Panoramic Aerial Photographs - Tetsuya Fujita
8. A Review of Researches on Analytical Mesometeorology - Tetsuya Fujita
9. * Meteorological Interpretations of Convective Nephelocumuli Appearing in TIROS Cloud Photographs - Tetsuya Fujita, Toshimitsu Ushijima, William A. Hess, and George T. Deibert, Jr.
10. * Study of the Development of Prefrontal Squall-Systems Using NSSP Network Data - Joseph L. Goldman
11. Analysis of Selected Aircraft Data from NSSP Operation, 1962 - Tetsuya Fujita
12. Study of a Long Condensation Trail Photographed by TIROS I - Toshimitsu Ushijima
13. A Technique for Precise Analysis of Satellite Data: Volume I - Photogrammetry (Published as MSL Report No. 14) - Tetsuya Fujita
14. Investigation of a Summer Jet Stream Using TIROS and Aerological Data - Kozo Ninomiya
15. Outline of a Theory and Examples for Precise Analysis of Satellite Radiation Data - Tetsuya Fujita
16. Preliminary Result of Analysis of the Cumulonimbus Cloud of April 21, 1961 - Tetsuya Fujita and James Arnold
17. A Technique for Precise Analysis of Satellite Photographs - Tetsuya Fujita
18. * Evaluation of Lumb Darkening from TIROS III Radiation Data - S.H.H. Larsen, Tetsuya Fujita, and W.L. Fletcher
19. Synoptic Interpretation of TIROS III Measurements of Infrared Radiation - Finn Pedersen and Tetsuya Fujita
20. * TIROS III Measurements of Terrestrial Radiation and Reflected and Scattered Solar Radiation - S.H.H. Larsen, Tetsuya Fujita, and W.L. Fletcher
21. On the Low-level Structure of a Squall Line - Henry A. Brown
22. * Thunderstorms and the Low-level Jet - William D. Bonner
23. * The Mesanalysis of an Organized Convective System - Henry A. Brown
24. Preliminary Radar and Photogrammetric Study of the Illinois Tornadoes of April 17 and 22, 1963 - Joseph L. Goldman and Tetsuya Fujita
25. Use of TIROS Pictures for Studies of the Internal Structure of Tropical Storms - Tetsuya Fujita with Rectified Pictures from TIROS I Orbits 125, R/O 128 - Toshimitsu Ushijima
26. An Experiment in the Determination of Geostrophic and Isobaric Winds from NSSP Pressure Data - William Bonner
27. Proposed Mechanism of Hook Echo Formation - Tetsuya Fujita with a Preliminary Mesosynoptic Analysis of Tornado Cyclone Case of May 26, 1963 - Tetsuya Fujita and Robb Stahmer
28. The Decaying Stage of Hurricane Anna of July 1963 as Portrayed by TIROS Cloud Photographs and Infrared Radiation from the Top of the Storm - Tetsuya Fujita and James Arnold
29. A Technique for Precise Analysis of Satellite Data, Volume II - Radiation Analysis, Section 6. Fixed-Position Scanning - Tetsuya Fujita
30. Evaluation of Errors in the Graphical Rectification of Satellite Photographs - Tetsuya Fujita
31. Tables of Scan Nadir and Horizontal Angles - William D. Bonner
32. A Simplified Grid Technique for Determining Scan Lines Generated by the TIROS Scanning Radiometer - James E. Arnold
33. A Study of Cumulus Clouds over the Flagstaff Research Network with the Use of U-2 Photographs - Dorothy L. Bradbury and Tetsuya Fujita
34. The Scanning Printer and Its Application to Detailed Analysis of Scanning Radiation Data - Tetsuya Fujita
35. Synoptic Study of Cold Air Outbreak over the Mediterranean using Satellite Photographs and Radiation Data - Aasmund Rabba and Tetsuya Fujita
36. Accurate Calibration of Doppler Winds for their use in the Computation of Mesoscale Wind Fields - Tetsuya Fujita
37. Proposed Operation of Instrumental Aircraft for Research on Moisture Fronts and Wake Depressions - Tetsuya Fujita and Dorothy L. Bradbury
38. Statistical and Kinematical Properties of the Low-level Jet Stream - William D. Bonner
39. The Illinois Tornadoes of 17 and 22 April 1963 - Joseph L. Goldman
40. Resolution of the Nimbus High Resolution Infrared Radiometer - Tetsuya Fujita and William K. Bandeen
41. On the Determination of the Exchange Coefficients in Convective Clouds - Rodger A. Brown

* Out of Print

** To be published

(Continued on back cover)

SATELLITE AND MESOMETEROLOGY RESEARCH PROJECT

Department of the Geophysical Sciences

The University of Chicago

LUBBOCK TORNADOES

of

11 May 1970

by

Tetsuya Theodore Fujita

(Preprint of draft to be published in Weatherwise)

SMRP Research Paper #88

July 1970

The research reported in this paper was supported by the National Aeronautics and Space Administration under grant NGR 14-001-008 and the Environmental Science Services Administration under grant ESSA E-198-68 (G).

LUBBOCK TORNADOES¹

Tetsuya Theodore Fujita
The University of Chicago

After 70 years of immunity, Lubbock, Texas, a city of 170,000, was hit by two tornadoes on 11 May 1970; a small one at about 8:45 pm CDT and a giant one around 9:45 pm CDT. The latter one left a path of devastating damage between the downtown area and Lubbock Municipal Airport. According to the latest statistics of severe local storm occurrences by ESSA (1969), there have been 49 verified tornado occurrences in the 1^o square around Lubbock in the 13-year period 1955-1967 and 54 in the 1^o square around Amarillo. The area between these two cities reported a much greater frequency of tornado occurrences.

First Tornado, A Small Forerunner

A funnel cloud related to the first tornado was reported by an off-duty policeman at 8:10 pm; meanwhile, a small hook echo was detected by the WSR-1 radar at the Lubbock Weather Bureau station. The hook echo was tracked by the radar until 8:45 pm when a funnel cloud was reported 3 miles east of the city limits (Fig. 1). The first tornado appeared to be a forerunner of the second and was strong enough to blow down fences and billboards in directions indicating a cyclonic circulation. The width of the damage caused by estimated 75 mph gusts was about 2 miles. The strongest wind inside this tornado occurred as it moved over the U. S. 82 and Parkway Drive interchange. According to the Lubbock Avalanche Journal, "At this site, 13 beams, weighing 109,000 pounds each--each in place with a concrete dowel and doubly weighted with claims--blew from atop the overpass under construction." The size of the damaged concrete structure is seen in comparison with a man standing in the picture (Fig. 2). When an aerial picture of the overpass is examined in detail, it becomes evident that the damage is not uniform to all 35 beams. Instead, the 13 affected beams happened to be

The research reported in this paper was supported by the National Aeronautics and Space Administration under grant NGR 14-001-008 and the Environmental Science Services Administration under grant ESSA E-198-68 (G).

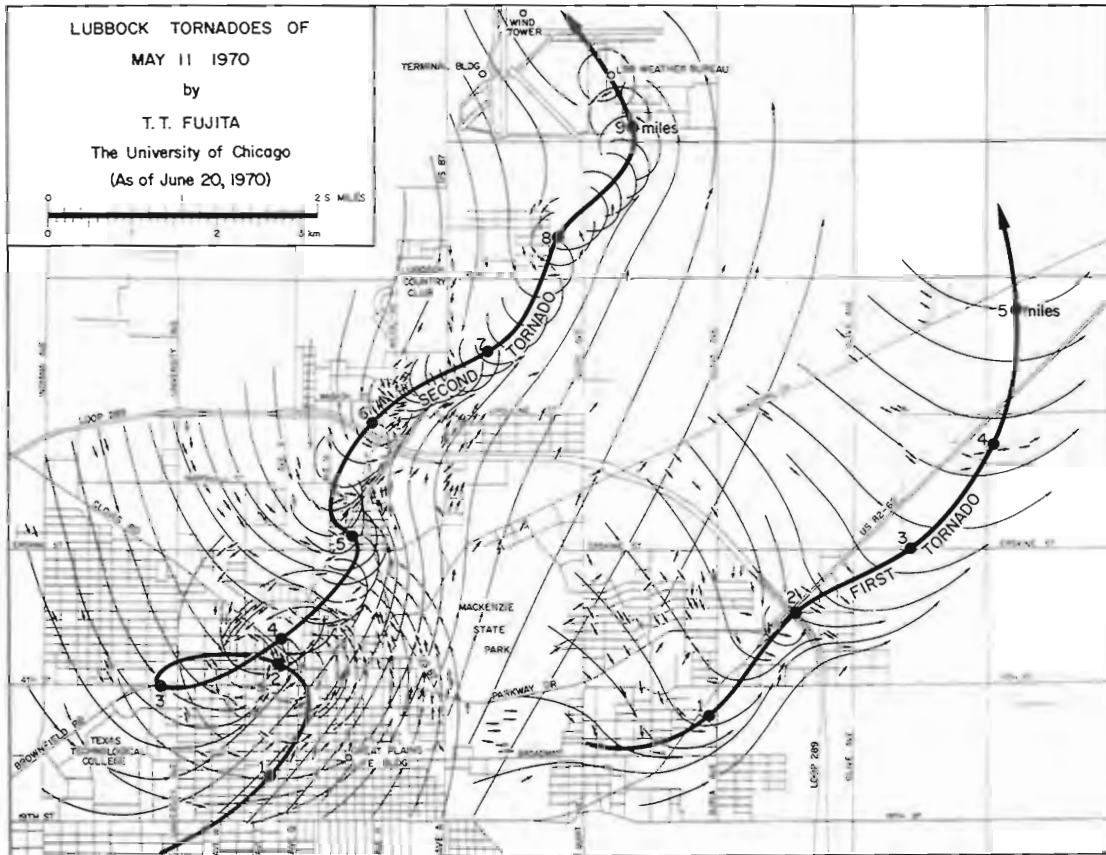


Fig. 1. Paths of two Lubbock tornadoes with distance traveled in miles. The first tornado moved over the northeast section of the city between 8:10 and 8:45 pm. The second, a giant tornado, struck the downtown area around 9:45 pm. Directions of damaging winds are shown by short arrows.



Fig. 2. Sections of 109,000 lb. beams at U. S. 82 and Parkway Drive interchange which were blown down by the first tornado. (Courtesy of Mr. Milton Adams, Lubbock Avalanche Journal photographer)

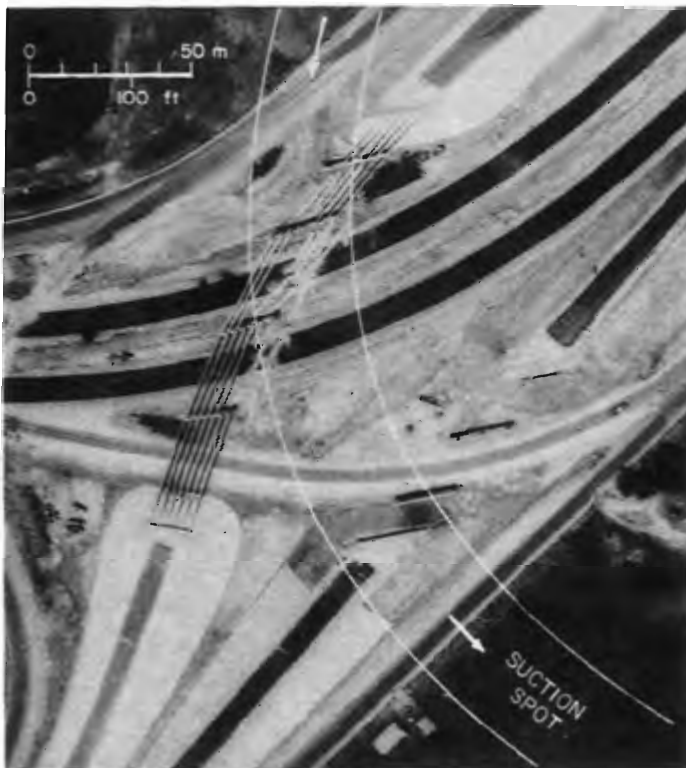


Fig. 3. Aerial view of the damaged interchange structure. Localized damage pattern indicates existence of a suction spot about 30 meters in diameter which moved over the structure from north to south. (Photograph by NASA)

in the path of a suction spot which moved around the core of the first tornado. The wind speed and the pressure effects to produce this damage will be estimated later through structural analyses (Fig. 3).

Tornado Suction Spots

The term "suction spot" was first introduced by Fujita (1967) who concluded that a number of cycloidal marks left in a corn field were caused by three to five spots where the suction effects of a tornado were concentrated. The size of each suction spot was only about 1/20 of the diameter of the tornado's core. In some respects, these suction spots resemble convective towers around the eye of a hurricane, because the vertical motion around the eye is not uniformly distributed but is concentrated inside several towers rotating around the fringe of the eye. There are evidences that suction spots are in a state of slow rotation while moving around the fringe of a tornado core, where the rotational wind of a tornado as a whole reaches a maximum.

The Second Tornado, A Giant Tornado

To inspect the damage caused by the second Lubbock tornado, the major one which originated in the downtown area, the author made an aerial survey from a helicopter. He made an intensive search for damage patterns which could be related to the paths of suction spots. During a few hours of surveying, a large number of semicircular patterns of severe damage were observed which could have been caused by suction spots around the core of the second tornado. Later, when the locations of occurrence of the 28 deaths due to the tornado were plotted on a map with suction spot paths, a remarkable coincidence was found; all deaths and fatal injuries except one, or 95% of all fatalities, occurred along the path of suction spots which may be called a suction swath or suction mark (Fig. 4).

The pattern of suction swaths of the tornado as it moved over the downtown area consisted of concentric semicircles, suggesting that the storm's core shrank very rapidly from a diameter of about 2 miles to 0.4 mile while the rotational wind speed increased due to the shrinking core diameter.

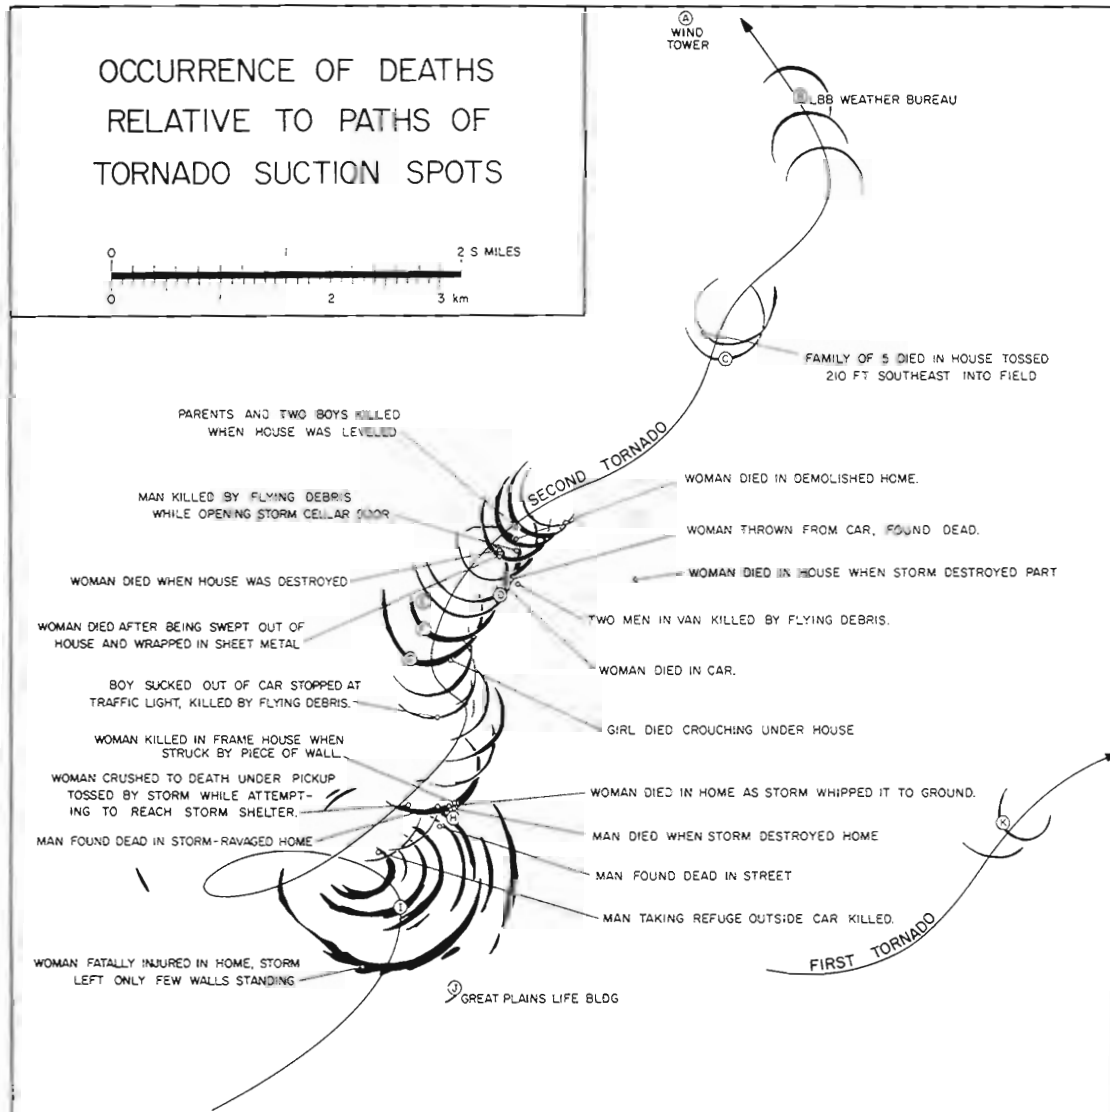


Fig. 4. Location of occurrence of 26 deaths resulting from the second tornado, two at unknown locations are not included. Note that all deaths occurred within narrow swaths of suction spots or suction marks. For suction marks see Fujita, Braddy, and Van Tuilenar (1972).

An observer's sketch of the echo seen on the AN/FPS-77 radar scope at Reese AFB clearly indicated a hook echo spiraling around a core with a diameter of one mile and centered to the northwest of the Great Plains Life Building. At that time, the spiral echo was about 11 miles from Reese AFB. A few minutes earlier, at 9:35 pm, the Lubbock Weather Bureau radar picked up the same hook echo encircling some 180 degrees around the circulation center. The hook echo was tracked until 9:50 pm, at which time it was too near the radar station to be seen on the scope.

The tornado made a gradual left turn and the core diameter shrank to about 0.4 mile as the tornado center was moving in a westward direction. Meanwhile, the tornado weakened considerably, thus losing most of its intense suction spots. Upon reaching University Avenue and 4th Street, the center reversed its course by 180 degrees and headed eastward, then east northeast while it reintensified into a destructive storm. After leaving swaths of devastating damage, the storm headed toward the north northeast.

According to the author's estimate, the tornado center passed in a north northwesterly direction over the Weather Bureau where a minimum sea level pressure of 996.9 mb was recorded (Fig. 5). The estimated translational speed of the tornado as it traveled from Lubbock proper (9:35 pm) to the Airport wind tower (10:03 pm) was 21 mph along a curved path with a loop. Using this translational speed, the time scale in the pressure chart was converted into a space scale. It can be seen that the low pressure field surrounding the tornado was approximately 10 miles in diameter. The best-fit pressure field of a Rankine vortex implies that the pressure inside the 0.4 mile tornado core should have been much lower than that indicated by the pressure trace. The core diameter of the tornado vortex as it moved over the Weather Bureau was between 0.3 and 0.4 mile. Suction-spot paths were found on both north and south sides of the Weather Bureau, without breaking any windows.

Weather Situation

On 11 May 1970 the sky over Lubbock was clear until around 3:00 pm CDT. Dew-point temperatures were near 40°F which is too low to support any severe convective

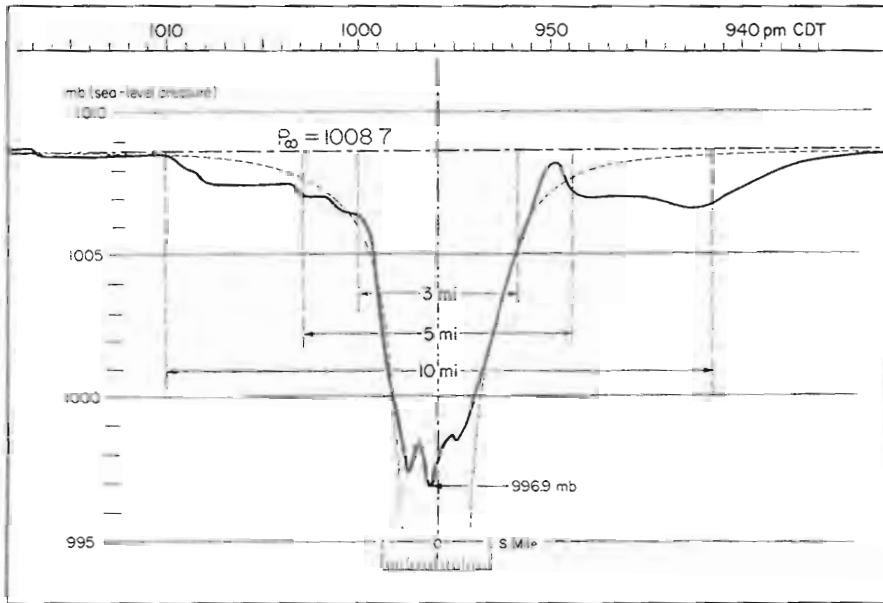


Fig. 5. Enlarged barograph trace from Lubbock Weather Bureau. Dashed line represents pressure profile computed from Rankine vortex which best fits to recorded pressure profile.

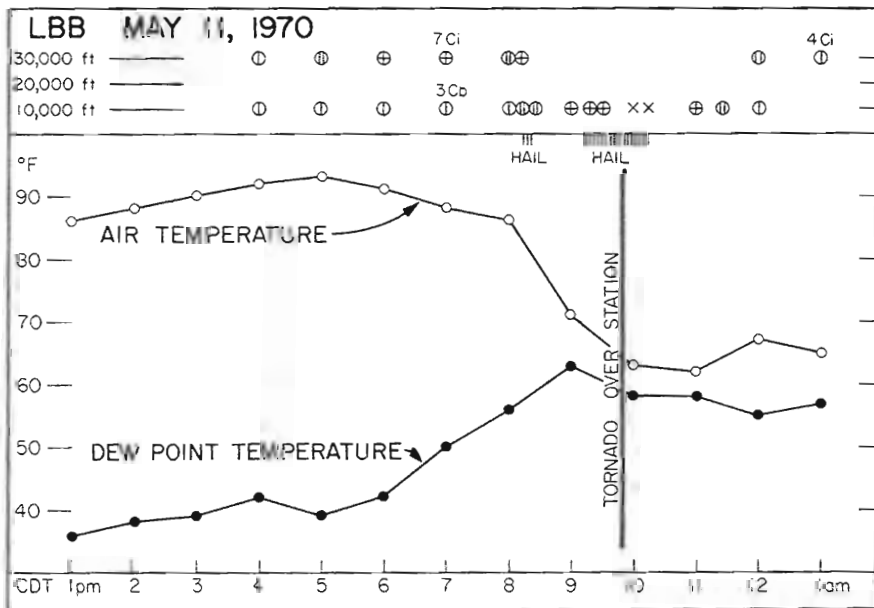


Fig. 6. Air and dewpoint temperatures and cloud cover reported by the Lubbock Weather Bureau on 11 May 1970. The station is 5 miles north-northeast of downtown area. The two hail periods began shortly before the two tornadoes struck.

activity (Fig. 6). By 4:00 pm some cumuli with bases at 8000 feet had developed and scattered cirrus at 30,000 feet was observed but there was no indication of major vertical development until near 6:00 pm when towering cumuli were seen in all quadrants. By 7:00 pm cumulonibi were observed to the south and distant north northeast.

An enlarged ATS-III picture with superimposed dewpoint isotherms in dashed lines and surface winds at 7:00 pm reveals that the moist air from the Gulf was pushing north northeastward with a front extending from western Texas and central Kansas to Iowa (Fig. 7). A southwesterly flow of dry air from central Mexico extended as far north as central Kansas, thus producing a marked moisture gradient along the moisture front. The difference between these dry and moist air masses is seen clearly in the Amarillo and Midland soundings taken at 7:00 pm CDT. Lubbock is located halfway between these two stations. Over Amarillo there was a dry - adiabatic layer of 42°C potential temperature extending up to 13,000 ft. MSL, but with the condensation level at 16,000 ft. ,cumulus growth was prohibited in this dry air. Over Midland, however, the moist air from the Gulf extended up to 10,000 ft. MSL, showing a uniform potential temperature of 41°C and a condensation level at 11,000 ft. MSL. Under these conditions the virtual temperature of the moist air will exceed that of the dry air aloft by receiving a small amount of heat from the underlying ground. A slight topographic lifting of the moist air over western Texas will result in a vigorous overturning along the leading edge of the moisture front.

ATS-III Pictures

May 11 was selected as a day of activity for the "Tornado Watch Experiment" which was conducted jointly by NASA and ESSA during the tornado season of 1970. Thus the ATS-III was programmed to take pictures at 11-min intervals during the daylight hours. A sequence of 62 pictures was obtained and then enlargement of the area was made into pictures of highest possible resolution. Those taken at 6:00, 7:00, and 8:00 pm CDT (Fig. 8) are shown with superimposed surface reports. A distance scale in each picture shows that we can see 2- to 3-mile size clouds. A front between the dry air to the northwest and the moist air to the southeast is

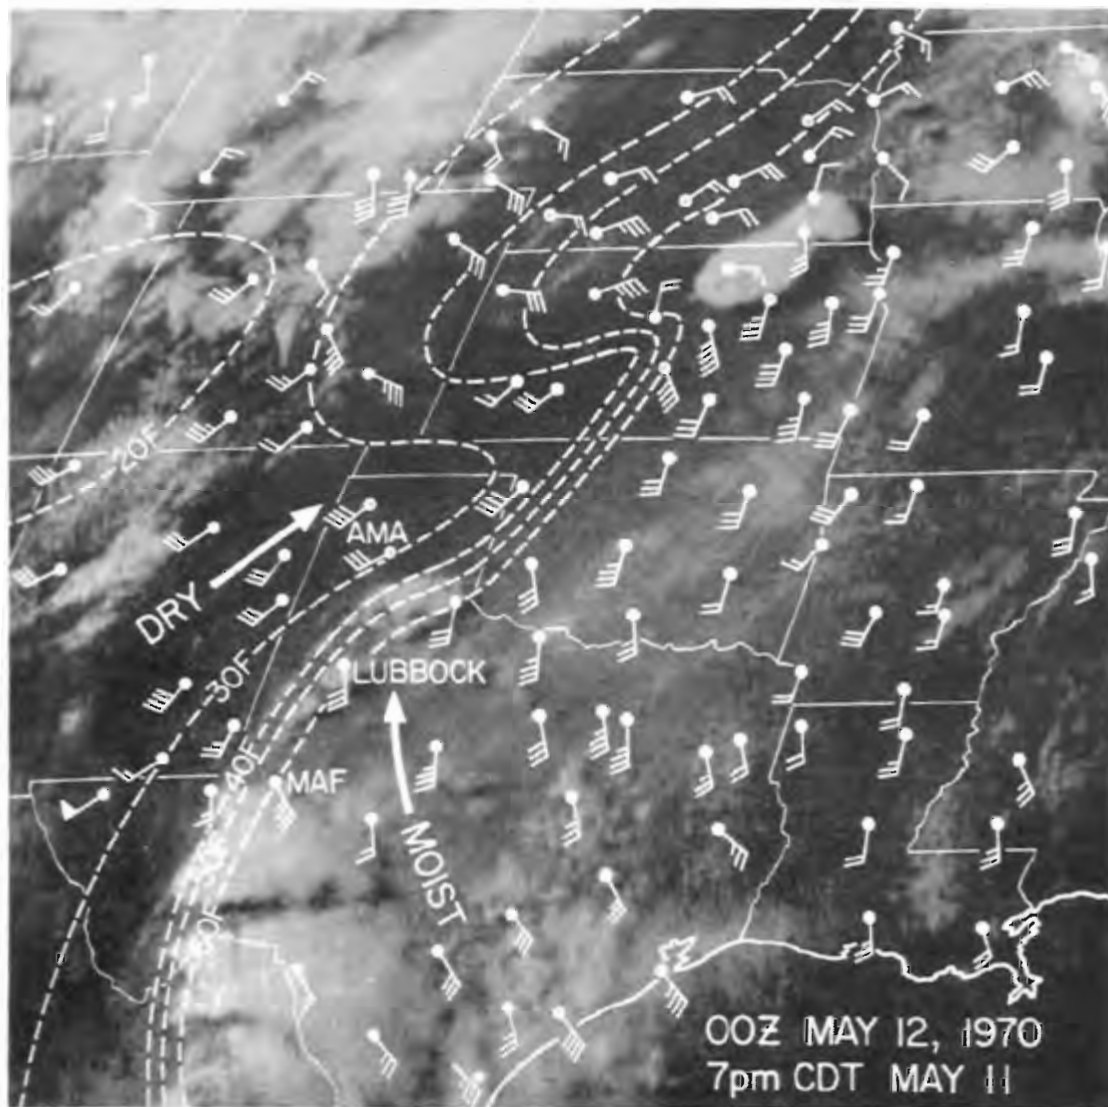


Fig. 7. Patterns of air flow and dewpoint isotherms superimposed upon an ATS-III picture for 7:00 pm. Note the tornado cloud to the south of Lubbock. The large cloud mass to the northeast of the Kansas-Nebraska border produced several small tornadoes. Each wind barb equals 5 knots. (ATS-III picture by NASA)

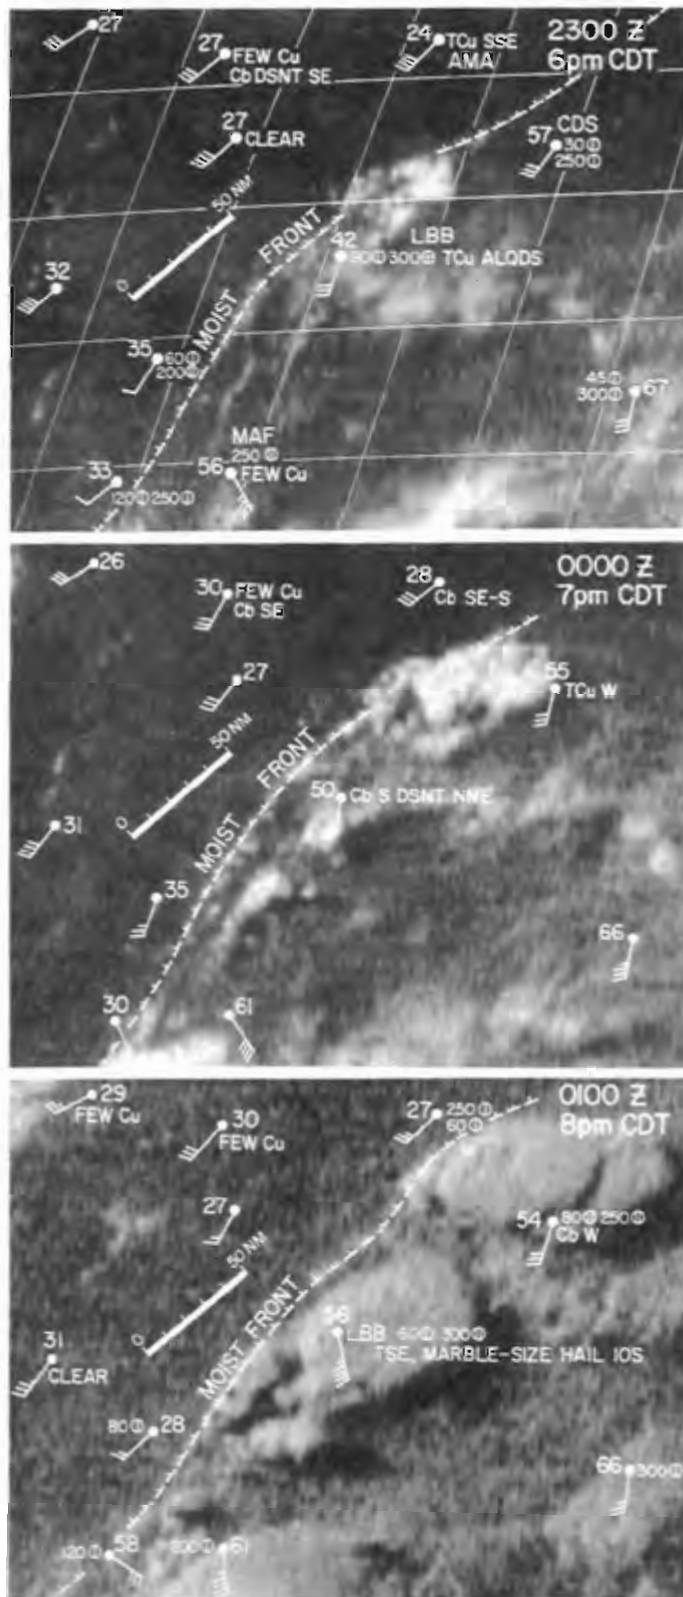


Fig. 8. Three satellite pictures showing the development of the Lubbock meso-scale cloud. Upper picture has a superimposed one degree latitude-longitude grid. The advancing front of moist air from the Gulf is indicated as "moist front." Each wind barb equals 5 knots. (8X enlargement satellite pictures by NASA)

readily seen as a cumulus line separating the dark area to the northwest from the gray area.

An analogy may be made here between the moisture front and temperature front. That moisture front where moist air replaces dry air is termed a moist front and where dry air replaces moist air is a dry front. These correspond to the warm and cold fronts.

These pictures show that at 6:00 pm, Lubbock was in the moist air mass about 15 miles southeast of the moist front while Amarillo was deep inside the dry air mass with a dewpoint temperature of 24°F. Most of the white to gray clouds east-southeast of Lubbock are cirrus moving from WSW at 25 to 28 knots. A few thunderstorms can be seen to the northeast but no cumulonimbi clouds of greater diameter than 5 miles are visible in the 6:00 pm picture. By 7:00 pm the moist front reached a point about 20 miles northwest of Lubbock and a circular anvil cloud, 13 miles in diameter, formed to the south, with its northern edge approaching near to Lubbock. A close observation of the picture shows two overshooting tops of cumulonibi near the western edge of the anvil cloud. By 8:00 pm, 10 min before a funnel was reported by an off-duty policeman, the circular-shaped anvil cloud had rapidly expanded into an elliptical shape. In fact, the downwind edge of the anvil cloud expanded at a rate of 33 knots, which is 40% higher than the Amarillo windspeed and 30% higher than the Midland windspeed at 250 mb. Such an explosive expansion is the result of the storm's vigorous outflow field which is an indication of the violent convection taking place within the area of the anvil. At 8:00 pm the Lubbock Weather Bureau reported a thunderstorm to the southeast and marble size hail about 10 mi south of the station.

Unfortunately, because of darkness, the last ATS-III picture was taken at 8:00 pm. These pictures did show, nonetheless, that the first Lubbock tornado cloud originated shortly after 6:00 pm some 25 miles to the south of Lubbock, 15 to 20 miles behind the moist front moving northwest. The storm cloud did not form, as in many cases, in a region where warm moist air was plowed by advancing cold air. Instead, it originated just behind an advancing moist front with small temperature difference between the two air masses.

WSR-57 Radar Pictures

Amarillo was the only WSR-57 radar station near enough to the tornadic activity to detect the Lubbock storms. A collection of radar scope pictures at 30-min intervals reveals that there was no echo from the expected location of the storm cloud. At 6:30 pm the radar picture shows a rapidly growing echo to the south of Lubbock, which changed into a double-celled structure by 7:00 pm. At this time the northern edge of the echo was only a few miles from Lubbock. By 8:00 pm the major echo and two smaller ones to the west-southwest had split forming three echo pairs. The location of the first tornado is shown in the 8:30 and 9:00 pm pictures in small circles. There were no characteristic hook echoes visible in these pictures because of the great distance of the storm from Amarillo (Fig. 9).

Between 9:00 and 10:30 pm a significant echo convergence took place. This is approximately the time of occurrence of the second tornado, the devastating Lubbock storm. During this period all small echoes to the southwest of the major echo converged to the nearly stationary major one. It has been known that echo convergence and even echo collision take place at the time of tornado occurrences, a similar phenomenon in this case might be described by saying that the "Lubbock storm echo swallowed all small echoes to the southwest."

After 11:00 pm some of the echo motions began to show signs of rotation. So seen in the midnight picture, there are two definite circulations about 50 miles in diameter. A third one with a smaller diameter is also seen in the picture. At this time, however, the transition from the initial appearance of the Lubbock tornado echo to this circulation is not clear.

A radar thin line which appears along the line of large refractive index gradient is clearly visible in these radar pictures taken between 7:00 pm and midnight. Its location corresponds to the line of small cummuli in the ATS-III pictures. Due to their relatively shallow depth, thin lines can be seen only within about 50 miles from the radar station.

As has been pointed out by Fujita (1965) and Browning (1964), a hook echo can be effectively seen only when it is near to a radar operated at low elevation angles. If we

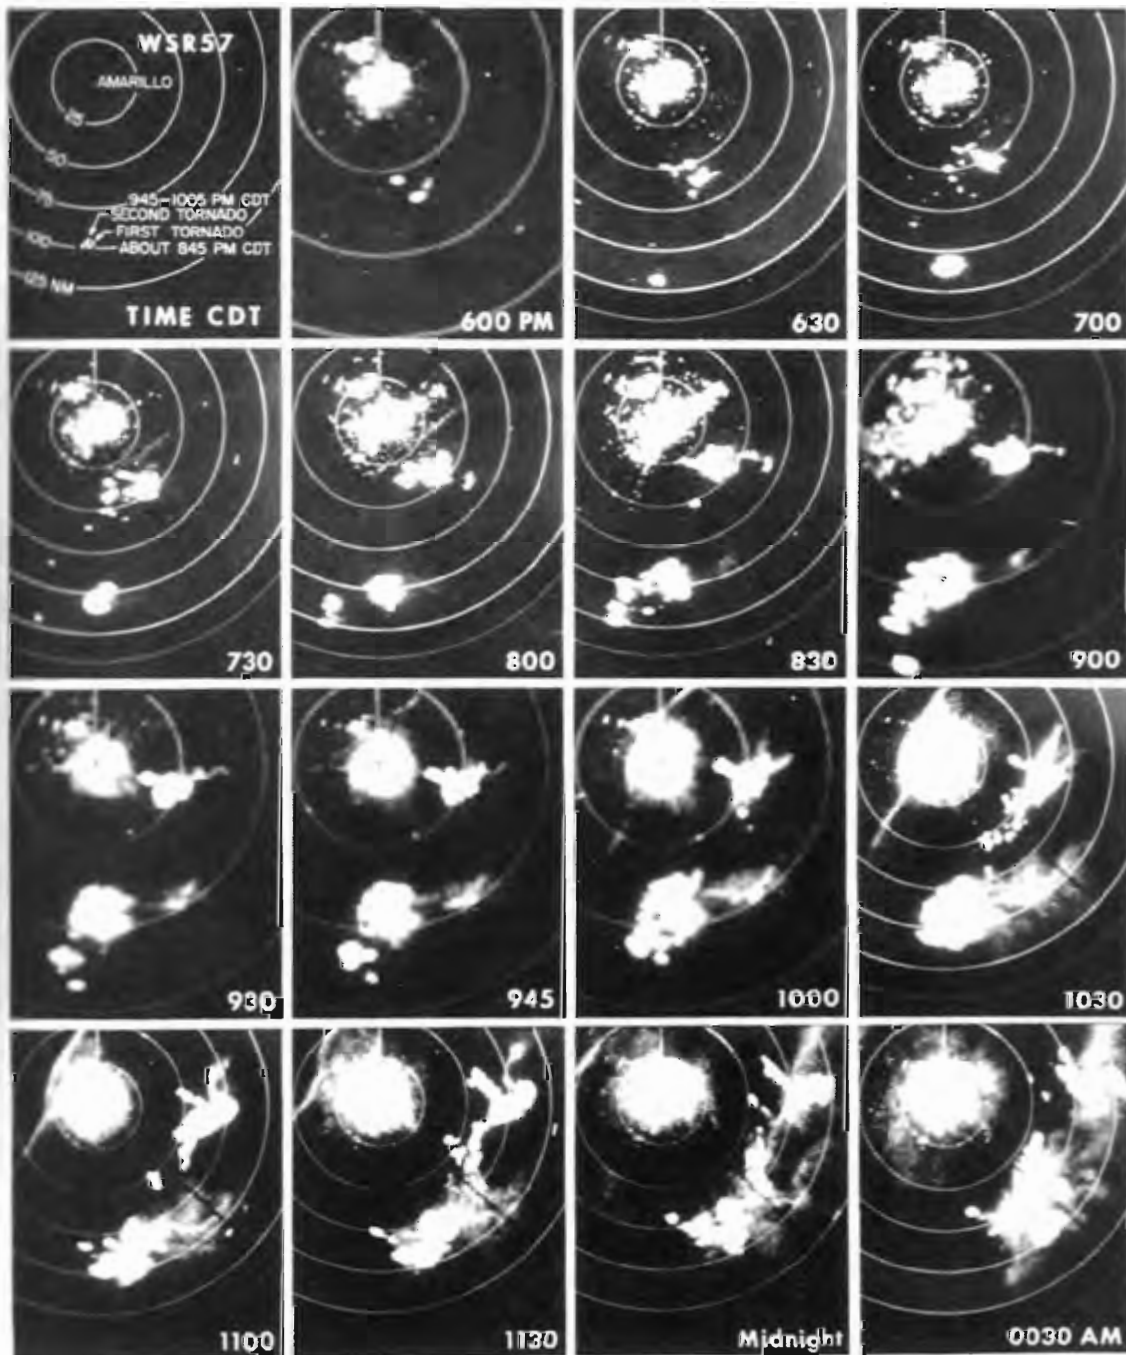


Fig. 9. WSR-57 scope pictures taken by Amarillo Weather Bureau. Small circles in 8:30 and 9:00 pm pictures indicate locations of first tornado and in 9:45 and 10:00 pm pictures that of second tornado. Note that the radar pattern began showing large vortex motion one hour after dissipation of second tornado.

intend to use PPI radars for tornado warning based upon hook-echo detection, it will be necessary to operate a radar station within 50 miles of cities in tornado alleys. Successful detection of hook echoes by the Lubbock Weather Bureau and Reese AFB personnel lead to immediate tornado warnings. It should also be noted that large circulation echoes such as seen in the midnight picture did not produce tornadoes. Tornado-producing hook echoes usually have an eye of no more than 3 miles in diameter, around which a hook encircles.

Estimated Windspeeds from Suction Swaths

The traveling speed of suction spots as they move around a tornado core represents the rotational speed of the storm. For a tornado with core diameter, D , traveling speed, U , and funnel rotational speed, V , the distance, S , between suction swaths measured along the path of the tornado center is given by

$$S = U \Delta t = \pi D U V^{-1}$$

where Δt is the time required for a specific suction spot to make one complete rotation around the tornado core. Fujita (1967) and Fujita, Bradbury, and Van Tuilenor (1970) reported that there were 3 to 5 suction spots moving around a tornado core.

If the number of evenly distributed suction spots around the core is n , the rotational speed, V , of a funnel can be expressed by

$$V = \frac{\pi D U}{n S}.$$

A large number of suction swaths were found in the area of the second tornado, but, for an example, these suction swaths just north of Kent St. are shown along with the path of the tornado center (Fig. 10). The distance between these suction swaths was about 150 meters while the core diameter as determined from the shape of these swaths was 650 meters. Assuming the traveling speed of the tornado to be 21 mph, the rotational speed of the funnel is now given by

$$V = \frac{290}{m} \text{ mph}.$$

Since the exact number of suction spots is not known, a reasonable rotational speed must be selected between 290 mph and 145 mph because 97 mph, which corresponds

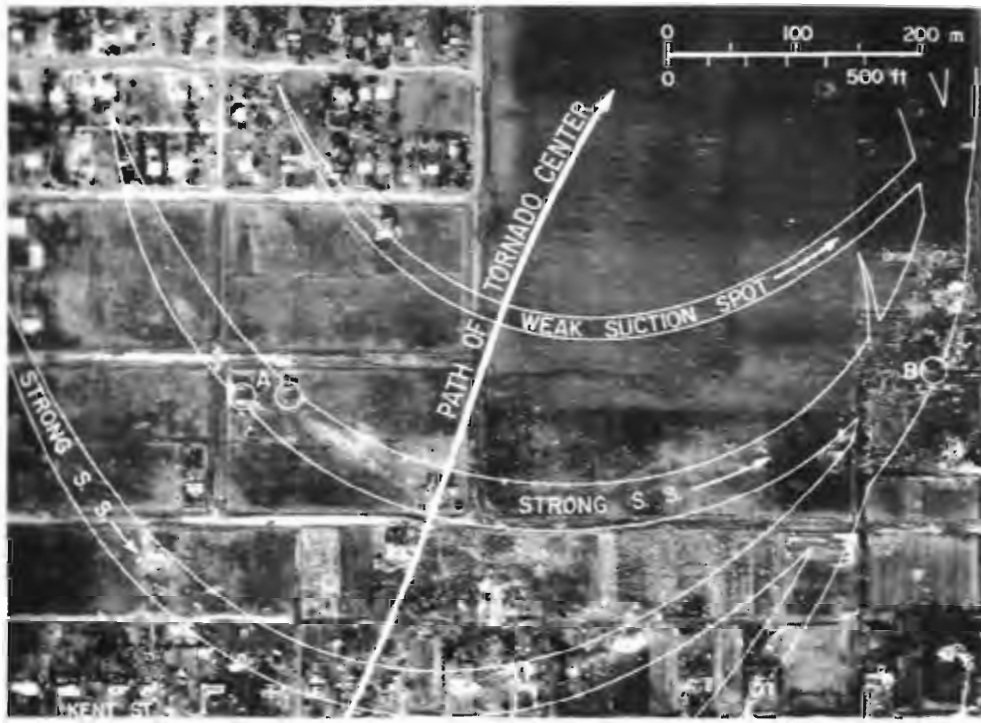


Fig. III. Pattern of three suction swaths north of Kent St. Destructive damage can be followed within each suction swath in the direction of arrows. Note that the extent of damage is not always related to distance of structures from tornado center. (Picture by NASA)



Fig. IV. Pile of bricks located near eastern edge of a suction swath. Picture taken looking south.

to $n = 3$, seems to be too low to cause such destruction as was observed in the area. At location A, everything from two houses except the concrete foundations were disintegrated and carried some 200 feet into the field. Five persons were killed at this location. At location 13, a large pile of construction bricks was at the eastern edge of a suction swath. A close-up picture of the pile looking south shows that the bricks were blown off from both ends, leaving a wake-flow pattern (Fig. 11).

Other Suction Spot Damage

There have often been reports of train derailments due to tornado winds. A very good example of the impact of a suction spot is illustrated by the chain of 18 freight cars which were on a railroad siding near Goodpasture, Inc. at the north edge of the town (Fig. 12). The final positions of the cars clearly indicate the path of a strong suction spot which moved from the lower left corner of the grain storage building to a demolished house on the left edge of the picture. Cars I and J were carried as far as 70 meters off the tracks.

From a spot north of this train an empty fertilizer tank weighing 16 tons traveled somehow to a spot 890 meters away (Fig. 13). There were evidences that the tank moved on the ground 190 m from its impact point to final resting point. A close examination of aerial photographs failed to find more than one impact point along the expected path of the tank. It is likely that the tank was airborne for a distance of 700 meters, crossing over US 87, a four-lane highway.

Within one block of the location where a woman died after being swept out of her house and wrapped in flying sheet metal, a tree was found standing "dressed-up" with pieces of sheet metal (Fig. 14).

The Goodpasture, Inc. grain elevator is located on the southwest edge of a suction swath. Five of the circular tops to the cylindrical grain bins were lifted and collapsed against the median superstructure between the bins (Fig. 15). These tops were made of 10-inch thick concrete. Beginning at the bottom of the picture it shows that the first bin was empty, the second was 95% full with grain visible in the picture, the third top was not lifted, and the fourth through sixth were empty and were lifted.

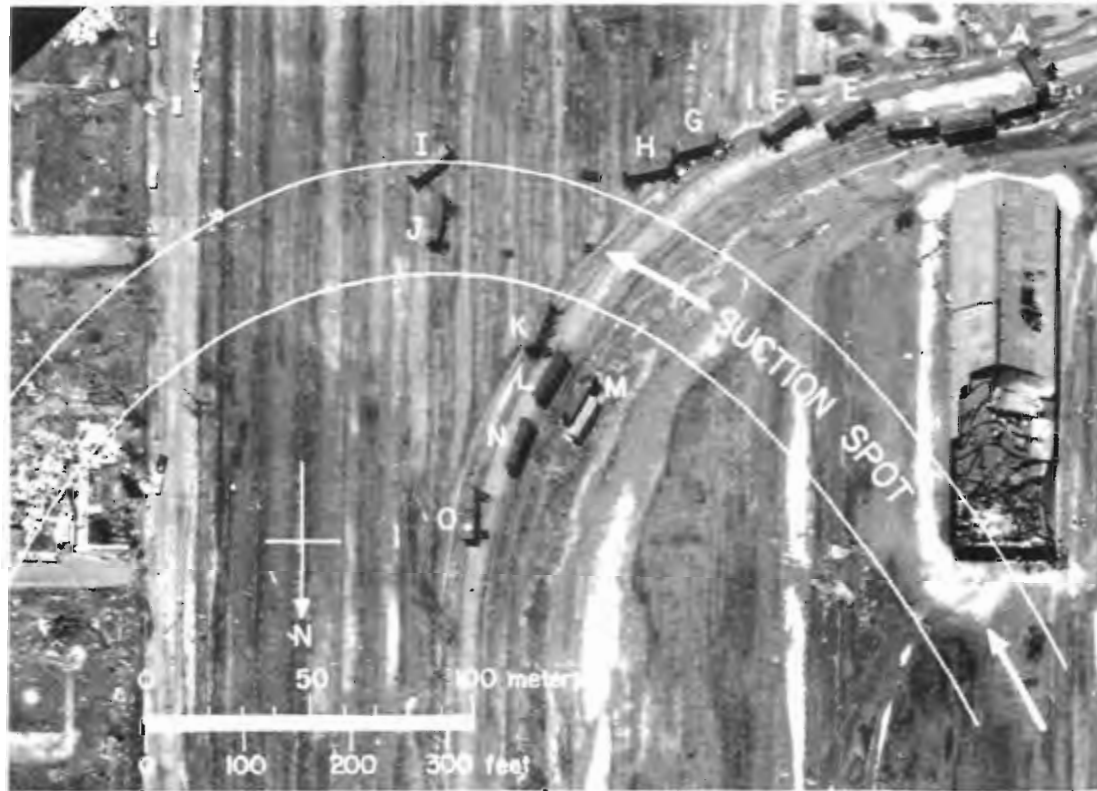


Fig. 12. Final position of 15 freight cars as related to the path of a suction spot. (Picture by NASA)



Fig. 13. A 16-ton empty fertilizer tank believed to have been airborne through a distance of 700 meters and then rolled 190 meters to its final resting position. (Picture and information supplied by Dr. J. A. Shanahan, Bechtel Corporation, San Francisco)



Fig. 14. A tree "dressed-up" with strip of sheet metal. Note that the upper part of tree was debarked.



Fig. 15. Lifted tops of grain storage bins at Goodpasture, Inc. Tops were made of 10-inch thick concrete and had a diameter of 33 feet. Note that the second one was 95% filled with grain while others damaged ones were empty.

If the lifting was the result of the expansion of in-storage air, the one which was 95% full should not have behaved like the empty ones. A closer examination and engineering analysis of these elevator storage bins are highly recommended.

A Wooden Shack in Tornado

A small wooden shack in a direct path of the second tornado was found to be practically undamaged because it was standing between suction swaths. A panoramic picture from southwest through northeast shows, from left to right, three buildings with increasing structural strength; a wooden shack, a frame house, and a block church (Fig. 16). After the passage of the tornado, the damage to these three structures was exactly opposite to what would be expected from structural strength. The block church was 90% destroyed, the frame house had damage to the roof and broken windows, while the wooden shack that could have been destroyed easily by 100 mph winds was nearly free of visible damage. The mystery is how the wind, pressure, and rate of pressure change which accompanied the very destructive second Lubbock tornado failed to damage a wooden shack located at the bottom of the boundary layer of the atmosphere as the tornado moved right over it. This evidence along with several others observed during the survey of the entire damage area suggest that the full effects of the wind forces and pressure drop are inside the suction spots with horizontal dimensions at least one order of magnitude smaller than those of the parent tornado core.

Due to the small size and fast traveling speed of suction spots, the rate of change in pressure must be at least 10 times greater than what had been previously computed from pressure profiles of tornadoes and their traveling speed.

Conclusions and Recommendations

Although the present findings by the author will require some revisions in light of further research on the Lubbock tornadoes, a list of tentative conclusions will be of value to those who are interested in violent tornadoes.



Fig. 16. Three structures with varying construction strengths which were located beneath the path of the second Lubbock tornado, a giant storm, with a core diameter of 0.5 miles.

- (1) The devastating Lubbock tornado was preceded by a weak tornado acting as a forerunner. A relatively large area should be included in the "Tornado Warning" issued by the Weather Bureau because destructive storms may occur anywhere in the vicinity. This recommendation was made by McCrabb (1970).
- (2) The Lubbock tornado cloud developed just behind a northwestward advancing moist front with little temperature difference across the front. Upper level conditions were not adequate to support the formation of a tornado outbreak such as the Palm Sunday 1965 storms.
- (3) The specially enlarged ATS-III pictures by NASA were useful in determining the features and location of the advancing moisture front as well as the localized intense convective systems in their early stages. For continuous day-and-night storm watch coverage, an infrared camera system is highly desirable.
- (4) The weather radars at Reese AFB and Lubbock Weather Bureau detected the tornado-bearing hook echoes. A complete analysis of the WSR-57 radar pictures from Amarillo is likely to establish the mechanisms for the development and growth of the mesocyclones forming immediately after the dissipation of the second Lubbock tornado.
- (5) The majority of deaths and fatal injuries due to the tornado occurred along the suction swaths inside the second tornado. However, a wooden shack located between two distinct suction swaths escaped damage when the tornado moved over it.
- (6) A suction spot will be accompanied by an excessive rate of pressure change because of its small size and fast traveling speed. The rate is likely to be

one order of magnitude larger than that computed from the pressure profile and movement of the tornado as a whole.

- (7) A survey of the structural damage over the entire affected area should be made in an attempt to estimate the effect of wind, pressure, and rate of pressure change. This effort should be combined with the meteorological aspects and fine structure of the tornadoes.

REFERENCES

- Browning, K. A., Airflow and Precipitation Trajectories Within Severe Local Storms Which Travel to the Right of the Winds, Journ. of Atmos. Sci., 21, (Nov. 1964), 634-639.
- Fujita, T. T., Formation and Steering Mechanism of Tornado Cyclone and Associated Hook Echoes, Mon. Wea. Rev., 93 (Feb. 1965), 67-78.
- _____, Estimated Wind Speeds of the Palm Sunday Tornadoes, SMRP Research Paper No. 53, The University of Chicago, (April 1967), 25 pp.
- _____, D. L. Bradbury, and C. F. Van Thullenar, Palm Sunday Tornadoes of April 11, 1965, Mon. Wea. Rev., 98, (Jan 1970), 29-69.
- Pautz, M. E. (Editor), Severe Local Storm Occurrences 1955-1967, Tech. Memo. WBTM FCST 12, ESSA, Weather Bureau, Weather Analysis and Prediction Division, Silver Springs, Md., Sept. 1969, 77 pp.
- McCrabb, Harold S., Effective Tornado Warnings. Unpublished paper presented at Lubbock Tornado Conference, Rockville, Md., June 24, 1970.

MESOMETEOROLOGY PROJECT - - - RESEARCH PAPERS

(Continued from front cover)

42. A Study of Factors Contributing to Dissipation of Energy in a Developing Cumulonimbus - Rodger A. Brown and Tetsuya Fujita
43. A Program for Computer Gridding of Satellite Photographs for Mesoscale Research - William D. Boncek
44. Comparison of Grassland Surface Temperatures Measured by TIROS VII and Airborne Radiometers under Clear Sky and Cirriform Cloud Conditions - Ronald M. Reap
45. Death Valley Temperature Analysis Utilizing Nimbus I Infrared Data and Ground-Based Measurements - Ronald M. Reap and Tetsuya Fujita
46. On the "Thunderstorm-High Controversy" - Rodger A. Brown
47. Application of Precise Fujita Method on Nimbus I Photo Gridding - Lt. Cmd. Ruben Nasta
48. A Proposed Method of Estimating Cloud-top Temperature, Cloud Cover, and Emittance of Clouds from Short- and Long-wave Radiation Data Obtained by TIROS Scanning Radiometers - T. Fujita and H. Grandoso
49. Aerial Survey of the Palm Sunday Tornadoes of April 11, 1965 - Tetsuya Fujita
50. Early Stage of Tornado Development as Revealed by Satellite Photographs - Tetsuya Fujita
51. Features and Motions of Radar Echoes on Palm Sunday, 1965 - D. L. Bradbury and T. Fujita
52. Stability and Differential Advection Associated with Tornado Development - Tetsuya Fujita and Dorothy L. Bradbury
53. Estimated Wind Speeds of the Palm Sunday Tornadoes - Tetsuya Fujita
54. On the Determination of Exchange Coefficients: Part II - Rotating and Nonrotating Convective Currents - Rodger A. Brown
55. Satellite Meteorological Study of Evaporation and Cloud Formation over the Western Pacific under the Influence of the Winter Monsoon - K. Teuchiya and T. Fujita
56. A Proposed Mechanism of Snowstorm Mesojet over Japan under the Influence of the Winter Monsoon - T. Fujita and K. Teuchiya
57. Some Effects of Lake Michigan upon Squall Lines and Summertime Convection - Walter A. Lyons
58. Angular Dependence of Reflection from Stratiform Clouds as Measured by TIROS IV Scanning Radiometers - A. Rabbe
59. Use of Wet-beam Doppler Winds in the Determination of the Vertical Velocity of Raindrops inside Hurricane Rainbands - T. Fujita, P. Black and A. Loesch
60. A Model of Typhoons Accompanied by Inner and Outer Rainbands - Tetsuya Fujita, Tatsuo Izawa, Kazuo Watanabe and Ichiro Inai
61. Three-Dimensional Growth Characteristics of an Orographic Thunderstorm System - Rodger A. Brown
62. Split of a Thunderstorm into Anticyclonic and Cyclonic Storms and their Motion as Determined from Numerical Model Experiments - Tetsuya Fujita and Hector Grandoso
63. Preliminary Investigation of Peripheral Subsidence Associated with Hurricane Outflow - Ronald M. Reap
64. The Time Change of Cloud Features in Hurricane Anna, 1961, from the Easterly Wave Stage to Hurricane Dissipation - James E. Arnold
65. Easterly Wave Activity over Africa and in the Atlantic with a Note on the Intertropical Convergence Zone during Early July 1961 - James E. Arnold
66. Mesoscale Motions in Oceanic Stratus as Revealed by Satellite Data - Walter A. Lyons and Tetsuya Fujita
67. Mesoscale Aspects of Orographic Influences on Flow and Precipitation Patterns - Tetsuya Fujita
68. A Mesometeorological Study of a Subtropical Mesocyclone - Hideroshi Arakawa, Kazuo Watanabe, Kiyoshi Teuchiya and Tetsuya Fujita
69. Estimation of Tornado Wind Speed from Characteristic Ground Marks - Tetsuya Fujita, Dorothy L. Bradbury and Peter G. Black
70. Computation of Height and Velocity of Clouds from Dual, Whole-Sky, Time-Lapse Picture Sequences - Dorothy L. Bradbury and Tetsuya Fujita
71. A Study of Mesoscale Cloud Motions Computed from ATS-I and Terrestrial Photographs - Tetsuya Fujita, Dorothy L. Bradbury, Clifford Marino and Louis Hull
72. Aerial Measurement of Radiation Temperatures over Mt. Fuji and Tokyo Area and Their Application to the Determination of Ground- and Water-Surface Temperatures - Tetsuya Fujita, Gisela Baralt and Kiyoshi Teuchiya
73. Angular Dependence of Reflected Solar Radiation from Sahara Measured by TIROS VII in a Torquing Maneuver - Rene Mendier
74. The Control of Summertime Cumuli and Thunderstorms by Lake Michigan During Non-Lake Breeze Conditions - Walter A. Lyons and John W. Wilson
75. Heavy Snow in the Chicago Area as Revealed by Satellite Pictures - James Bunting and James Lamb
76. A Model of Typhoons with Outflow and Subsidence Layers - Tatsuo Izawa

* out of print

(continued on outside back cover)

SATELLITE AND MESOMETEOROLOGY RESEARCH PROJECT - - - PAPERS

(Continued from inside back cover)

77. Yaw Corrections for Accurate Gridding of Nimbus HRIR Data - Roland A. Madden
78. Formation and Structure of Equatorial Anticyclones Caused by Large-Scale Cross Equatorial Flows Determined by ATS I Photographs - Tetsuya T. Fujita and Kazuo Watanabe and Tatsuo Izawa
79. Determination of Mass Outflow from a Thunderstorm Complex Using ATS III Pictures - T. T. Fujita and D. L. Bradbury
80. Development of a Dry Line as Shown by ATS Cloud Photography and Verified by Radar and Conventional Aerological Data - Dorothy L. Bradbury
81. Dynamical Analysis of Outflow from Tornado-Producing Thunderstorms as Revealed by ATS III Pictures - K. Ninomiya
82. Computation of Cloud Heights From Shadow Positions through Single Image Photogrammetry of Apollo Pictures - T. T. Fujita
83. Aircraft, Spacecraft, Satellite and Radar Observations of Hurricane Gladys, 1968 - R. Cecil Gentry, Tetsuya T. Fujita and Robert C. Sheets
84. Basic Problems on Cloud Identification Related to the Design of SMS-GOES Spin Scan Radiometers - Tetsuya Theodore Fujita
85. Mesoscale Modification of Synoptic Situations over the Area of Thunderstorms' Development as Revealed by ATS III and Aerological Data - K. Ninomiya
86. Palm Sunday Tornadoes of April 11, 1965 - T. T. Fujita, Dorothy L. Bradbury, and C. F. Van Thullenar. (Reprint from Mon. Wea. Rev., 98, 29-69, 1970)
87. Patterns of Equivalent Blackbody Temperature and Reflectance of Model Clouds Computed by Changing Radiometer's Field of View - Jaime J. Tecson